



Washoe County School District

**Purchasing Department • 14101 Old Virginia Road • Reno, NV 89521
Phone (775) 850-8025 • Fax (775) 857-3175**

ADDENDUM #2

CERTAIN PLEATED AIR FILTERS – RFQ #VP-1125-21

NOVEMBER 12, 2020

The following information, clarifications, changes, and modifications are by reference incorporated into the Request for Quote (RFQ) document for the above referenced project. Any work item or contract provision not changed or modified will remain in full force and effect. It is the prospective Vendor’s responsibility to read the entire RFQ and all appendices and to respond to all requirements completely.

All prospective Vendors should acknowledge receipt of this Addendum by signing this document and returning it with the RFQ submission. Failure to acknowledge receipt of this Addendum may result in a rejection of RFQ submission.

REVISED RFQ DUE DATE:

The due date of RFQ #VP-1125-21 has been changed from Friday, November 13, 2020 at 10:00 am to **Friday, December 18, 2020 at 10:00 am**. Vendors are still required to submit quotes as instructed in the RFQ document.

SPECIFICATION CLARIFICATION:

The following clarification is made to Addendum #1 and applies to RFQ #VP-1125-21:

D. FILTER DESCRIPTION

Filters offered must be the following brand or equal brand (specifications attached, 2 pages):

AAF/Flanders PerfectPleat HCM8

ACKNOWLEDGEMENT OF RECEIPT

Please return signed copy of Addendum #2 with RFQ submission packet.

AUTHORIZED SIGNATURE

DATE

PRINT NAME

TITLE

COMPANY NAME

PerfectPleat® HC M8

(High Capacity MERV 8)

EXTENDED SURFACE PLEATED PANEL FILTERS



- Highest performing self-supported pleated filter
- Mechanical efficiency – does not rely on electret charge technology
- Self-supporting DuraFlex® media made from virgin fiber; no wire support needed
- Consistent media with controlled fiber size and blend
- Available in 1", 2" and 4" models
- Environmentally friendly – no dies, no metal, fully incinerable
- Patented media, filter design, and manufacturing process. Patents covered under one or more of the following US 6398839 B2; US 6254653 B1; US 6159318; US 6165242; US 6387140 B1 (1" model only)

The PerfectPleat HC M8 filter is designed to consistently increase efficiency throughout the service life of the filter. The PerfectPleat HC M8 filter has approximately 25% more media than our standard capacity filter, and is ideal for applications where pleated filters are currently in use and higher performance is desired. They have an initial MERV 8 rating respectively, but the efficiency increases significantly when dust holding begins. PerfectPleat HC M8 filters have distinctive self-supporting characteristics that allow a pleating pattern, which promotes airflow and maximizes dust holding capacity (DHC). Lower pressure drop and higher DHC means reductions in energy consumption and operating costs.

Superior Design and Construction


The perimeter frame is constructed from the highest wet-strength 28 pt. beverage carrier board, securely bonded to the media pack. The 1" model employs three supporting straps on the air entering and air leaving sides of the filter to control pleat spacing and support the media pack in the perimeter frame.

Support straps on the air entering side are used in combination with uniquely designed pleat stabilizers on the air-leaving side of the 2" model to provide additional strength. The support straps and pleat stabilizers ensure integrity against turbulent airflow. The 2" filter resists crushing and abuse and provides excellent lateral stability for installation in side-access systems.

The 4" model utilizes a two piece die cut frame with integral pleat spacers on the air leaving side. Pleat spacing is controlled by straps bonded to the air entering side and the multiple rows of pleat spacers on the air leaving side. The pleat spacers also ensure the pleats remain open during use, maximizing filter life.

DuraFlex® Media—Patented Media Design

Uniform size virgin fibers are assembled in closely controlled blends to create a media that is both self-supporting and consistent in performance. When pleated, DuraFlex media will hold its shape without the wire support characteristic of conventional pleated filters. That means no potential for the formation of rust and safer handling. With the superior resiliency of DuraFlex media and no need for wire support, PerfectPleat HC M8 filters can sustain significant abuse and maintain their shape and pleat spacing. The absence of wire also makes the filter totally incinerable, which can simplify disposal.

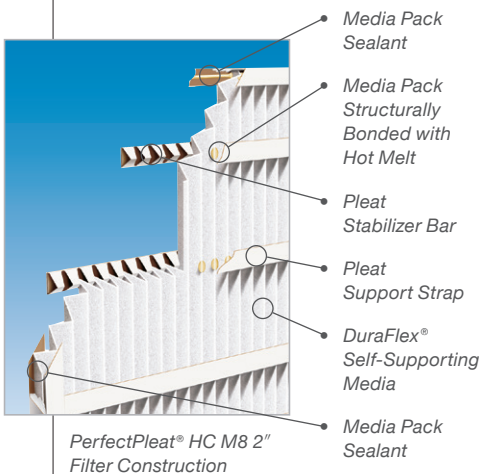

PerfectPleat® HC M8 Filters


Performance Data

Filter	Pleats Per Linear Foot	Rated Initial Resistance (in. w.g.)			Recommended Final Resistance (in. w.g.)	ASHRAE 52.2 MERV	Continuous Operating Temperature Limits
		300 FPM	500 FPM	625 FPM			
1" PerfectPleat HC M8	15	.23	.42	–	1.0	8	150°F (66°C)
2" PerfectPleat HC M8	15	.12	.23	.34	1.0	8	150°F (66°C)
4" PerfectPleat HC M8	11	.12	.25	.38	1.0	8	200°F (93°C)


All performance data is based on ASHRAE Standard 52.2. Performance tolerance conforms to Section 6.4 of ANSI/AHRI Standard 850-2013.

Underwriters Laboratories Classification – PerfectPleat HC M8 filters are UL Classified. Testing was performed according to UL Standard 900.

Composite Minimum Efficiency Curve

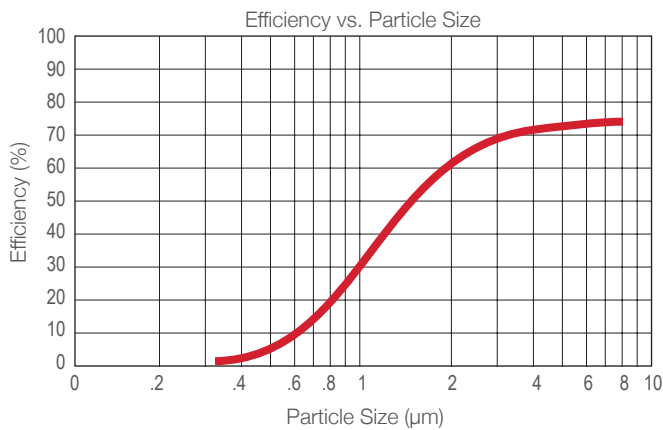

Initial Resistance vs. Filter Face Velocity

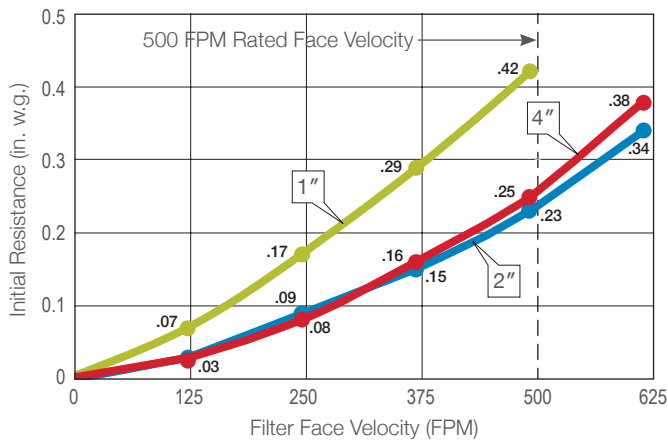

Product Information – Standard Sizes

Nominal Sizes (Inches) (W x H x D)	Actual Sizes (Inches) (W x H x D)	Rated Airflow (SCFM)			Pleats Per Filter
		300 FPM	500 FPM	625 FPM	
10 x 10 x 1	9½ x 9½ x ¾	200	350	–	11
10 x 20 x 1	9½ x 19½ x ¾	400	700	–	11
12 x 12 x 1	11½ x 11½ x ¾	300	500	–	14
12 x 20 x 1	11½ x 19½ x ¾	500	850	–	14
12 x 24 x 1	11¾ x 23¾ x ¾	600	1000	–	14
14 x 20 x 1	13½ x 19½ x ¾	600	1000	–	16
14 x 25 x 1	13½ x 24½ x ¾	750	1200	–	16
15 x 20 x 1	14½ x 19½ x ¾	650	1050	–	17
16 x 16 x 1	15½ x 15½ x ¾	550	900	–	19
16 x 20 x 1	15½ x 19½ x ¾	650	1100	–	19
16 x 25 x 1	15½ x 24½ x ¾	850	1400	–	19
18 x 20 x 1	17½ x 19½ x ¾	750	1250	–	21
18 x 24 x 1	17¾ x 23¾ x ¾	900	1500	–	21
18 x 25 x 1	17½ x 24½ x ¾	950	1550	–	21
20 x 20 x 1	19½ x 19½ x ¾	850	1400	–	24
20 x 25 x 1	19½ x 24½ x ¾	1050	1750	–	24
24 x 24 x 1	23¾ x 23¾ x ¾	1200	2000	–	29
25 x 25 x 1	24½ x 24½ x ¾	1300	2200	–	30
10 x 20 x 2	9½ x 19½ x 1¾	400	700	850	11
12 x 20 x 2	11½ x 19½ x 1¾	500	850	1050	14
12 x 24 x 2	11¾ x 23¾ x 1¾	600	1000	1250	14
14 x 25 x 2	13½ x 24½ x 1¾	750	1200	1500	16
15 x 20 x 2	14½ x 19½ x 1¾	650	1050	1300	17
15 x 25 x 2	14½ x 24½ x 1¾	800	1300	1650	17
16 x 16 x 2	15½ x 15½ x 1¾	550	900	1100	19
16 x 20 x 2	15½ x 19½ x 1¾	650	1100	1400	19
16 x 24 x 2	15¾ x 23¾ x 1¾	800	1350	1650	19
16 x 25 x 2	15½ x 24½ x 1¾	850	1400	1750	19
18 x 24 x 2	17¾ x 23¾ x 1¾	900	1500	1900	21
18 x 25 x 2	17½ x 24½ x 1¾	950	1550	1950	21
20 x 20 x 2	19½ x 19½ x 1¾	850	1400	1750	24
20 x 24 x 2	19¾ x 23¾ x 1¾	1000	1650	2100	24
20 x 25 x 2	19½ x 24½ x 1¾	1050	1750	2150	24
24 x 24 x 2	23¾ x 23¾ x 1¾	1200	2000	2500	29
25 x 25 x 2	24½ x 24½ x 1¾	1300	2150	2700	30
12 x 24 x 4	11¾ x 23¾ x 3¾	600	1000	1250	10
16 x 20 x 4	15¾ x 19¾ x 3¾	650	1100	1400	13
16 x 25 x 4	15¾ x 24¾ x 3¾	850	1400	1750	13
18 x 24 x 4	17¾ x 23¾ x 3¾	900	1500	1875	15
20 x 20 x 4	19¾ x 19¾ x 3¾	850	1400	1750	17
20 x 25 x 4	19¾ x 24¾ x 3¾	1050	1750	2150	17
24 x 20 x 4	23¾ x 19¾ x 3¾	1000	1650	2100	17
24 x 24 x 4	23¾ x 23¾ x 3¾	1200	2000	2500	21
25 x 29 x 4	24¾ x 28¾ x 3¾	1500	2500	3150	26

Energy savings may be realized by operating the PerfectPleat HC M8 filters to a lower final resistance. Contact your local AAF Flanders representative for a Total Cost of Ownership analysis for your specific application.

PerfectPleat® and DuraFlex® are registered trademarks of AAF International in the U.S. and other countries.



9920 Corporate Campus Drive, Suite 2200, Louisville, KY 40223-5690
888.223.2003 Fax 888.223.6500 | aafintl.com

AAF Flanders has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

©2017 AAF International and its affiliated companies.

ISO Certified Firm

AFP-1-210B 01/17